RL-TR-96-113
In-House Report
May 1996

CALCULATION OF THE DERIVATIVE OF THE PARABOLIC CYLINDER FUNCTION

Robert A. Shore, Thorkild B. Hansen

19970321 094

**Rome Laboratory
Air Force Materiel Command
Rome, New York**

DTIC QUALITY INSPECTED 3

This report has been reviewed by the Rome Laboratory Public Affairs Office (PA) and is releasable to the National Technical Information Service (NTIS). At NTIS it will be releasable to the general public, including foreign nations.

RL-TR-96-113 has been reviewed and is approved for publication.

APPROVED:

DANIEL J. JACAVANCO, Chief
Antennas and Components Division
Electromagnetics & Reliability Directorate

FOR THE COMMANDER:

ROBERT V. McGAHAN
Acting Director
Electromagnetics & Reliability Directorate

REPORT DOCUMENTATION PAGE

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden. to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE May 1996	3. REPORT TYPE AND DATES COVERED In-House Apr 95–Dec 95

4. TITLE AND SUBTITLE

Calculation of the Derivative of the Parabolic
Cylinder Function

6. AUTHOR(S)

Robert A. Shore, Thorkild B. Hansen*

5. FUNDING NUMBERS

PE 61102F
PR 2304
TA I3
WU 02

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)

Rome Laboratory/ERAA
31 Grenier St
Hanscom AFB, MA 01731-3010

8. PERFORMING ORGANIZATION REPORT NUMBER

RL–TR–96–113

9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)

10. SPONSORING / MONITORING AGENCY REPORT NUMBER

11. SUPPLEMENTARY NOTES

Rome Laboratory Project Engineer: Robert A. Shore/ERAA (617)377-2058
*Subcontractor for CUBRC

12a. DISTRIBUTION / AVAILABILITY STATEMENT

Approved for public release;
distribution unlimited.

12b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

The numerical evaluation of the derivative of the parabolic cylinder function, $D'_p(z)$, is described for the argument $z = x \exp(-i\pi/4)$ and order $p = 1/2 + iy$, with x and y real. The case is needed for calculating the currents excited on a parabolic cylinder by a transverse electric plane wave, and for calculating the scattered far field pattern. Numerically accurate and efficient expressions for $D'_p(z)$ are presented for each of five regions into which the xy plane is divided.

14. SUBJECT TERMS

Parabolic cylinder function   Derivative   Numerical calculation

15. NUMBER OF PAGES
14

16. PRICE CODE

17. SECURITY CLASSIFICATION OF REPORT	18. SECURITY CLASSIFICATION OF THIS PAGE	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT
Unclassified	Unclassified	Unclassified	SAR

NSN 7540-01-280-5500

DTIC QUALITY INSPECTED 3

Contents

Illustrations

Tables

Acknowledgments

Calculation of the Derivative of the Parabolic Cylinder Function

1 Introduction

This report describes the numerical evaluation of the derivative of the parabolic cylinder function, $D_p'(z)$, where $D_p(z)$ is the parabolic cylinder function defined by Whittaker and Watson [1, pp.347-349]. (See also [2, Ch.19], [3, Ch.46], and [4].) The numerical evaluation is for complex argument $z = xe^{-i\pi/4}$, and complex order $p = -1/2 + iy$, x and y real. This case is needed to calculate the currents excited on a perfectly conducting parabolic cylinder by a transverse electric (TE) plane wave, and the corresponding scattered far field pattern [5, Eqs. (7.47) and (7.48)]. This is the motivation for this report, designed to complement the valuable communication of Blanchard and Newman [6] which treats the numerical evaluation of the same case of the parabolic cylinder function itself, needed for the corresponding transverse magnetic (TM) scattering calculations [5, Eqs.(7.12) and (7.13)].

2 Numerical Evaluation of $D_p'(z)$

We present expansions for $D_p'(z)$ for $z = x\alpha$, $p = -1/2 + iy$, x and y real, and $\alpha = e^{-i\pi/4}$. The discussion closely parallels that of Blanchard and Newman [6]. We adopt their division of the xy plane into five regions, denoted Regions A-E, as shown in Figure 1, and give numerically useful expressions for calculating $D_p'(z)$ for each of these regions.

Region A: $|x| \leq 5$, $|y| \leq 4$.

In this region, the exact power series for $D_p'(z)$ can be used, obtained by differentiating the

exact power series of $D_p(z)$ given in [6]:

$$D_p'(z) = -\frac{2^{-(p+5)/2}e^{-z^2/4}}{\Gamma(-p)}\left\{\Gamma\left(\frac{1}{2}-\frac{p}{2}\right)\left[4 - p(\sqrt{2}z)^2\right.\right.$$
$$\left. + \sum_{k=2}^{\infty}\frac{(\frac{1}{2}-\frac{p}{2})\cdots(k-2+\frac{1}{2}-\frac{p}{2})}{(2k)!}\left[2k - 2(p+1)\right](\sqrt{2}z)^{2k}\right]$$
$$-\Gamma\left(-\frac{p}{2}\right)\left[(-2p-1)(\sqrt{2}z) + \sum_{k=1}^{\infty}\frac{(-\frac{p}{2})\cdots(k-1-\frac{p}{2})}{(2k+1)!}\left[2k+1 - 2(p+1)\right](\sqrt{2}z)^{2k+1}\right]\right\} \quad (1)$$

for $p \neq 0,1,2,...$, and where Γ is the gamma function [2, Ch.6]. On a computer with 16 digit double precision, this expression gives at least 6 digit accuracy in Region A if the summations are continued until the terms decrease below $1 \cdot 10^{-10}$ in magnitude. The gamma function of complex argument is also computed in double precision, using the relations (2) and (3), derived using the recurrence, reflection, and duplication formulas for the gamma function [2, Ch.6], to obtain $\Gamma(-p)$ and $\Gamma(1/2 - p/2)$ from $\Gamma(-p/2)$:

$$\Gamma(-p) = \left(\frac{\pi}{2}\right)^{1/2}2^{-(p+1/2)}\frac{1}{\cos\left(\frac{\pi p}{2}\right)}\frac{\Gamma\left(-\frac{p}{2}\right)}{\Gamma^*\left(-\frac{p}{2}\right)} \quad (2)$$

$$\Gamma\left(\frac{1}{2}-\frac{p}{2}\right) = \frac{\pi}{\cos\left(\frac{\pi p}{2}\right)}\frac{1}{\Gamma^*\left(-\frac{p}{2}\right)} \quad (3)$$

where $*$ denotes complex conjugation.

Although the exact power series (1) for $D_p'(z)$ is absolutely convergent for all x and y, the terms of the sums grow very large before they become small if $|x|$ or $|y|$ is large, just as happens for $D_p(z)$ itself [6]. The accuracy of (1) is then degraded by the process of subtracting large numbers of comparable magnitude, and also eventually by the generation of numbers that overflow the dynamic range of the computer.

Region B: $x \geq 5$, $|y| \leq 2$.

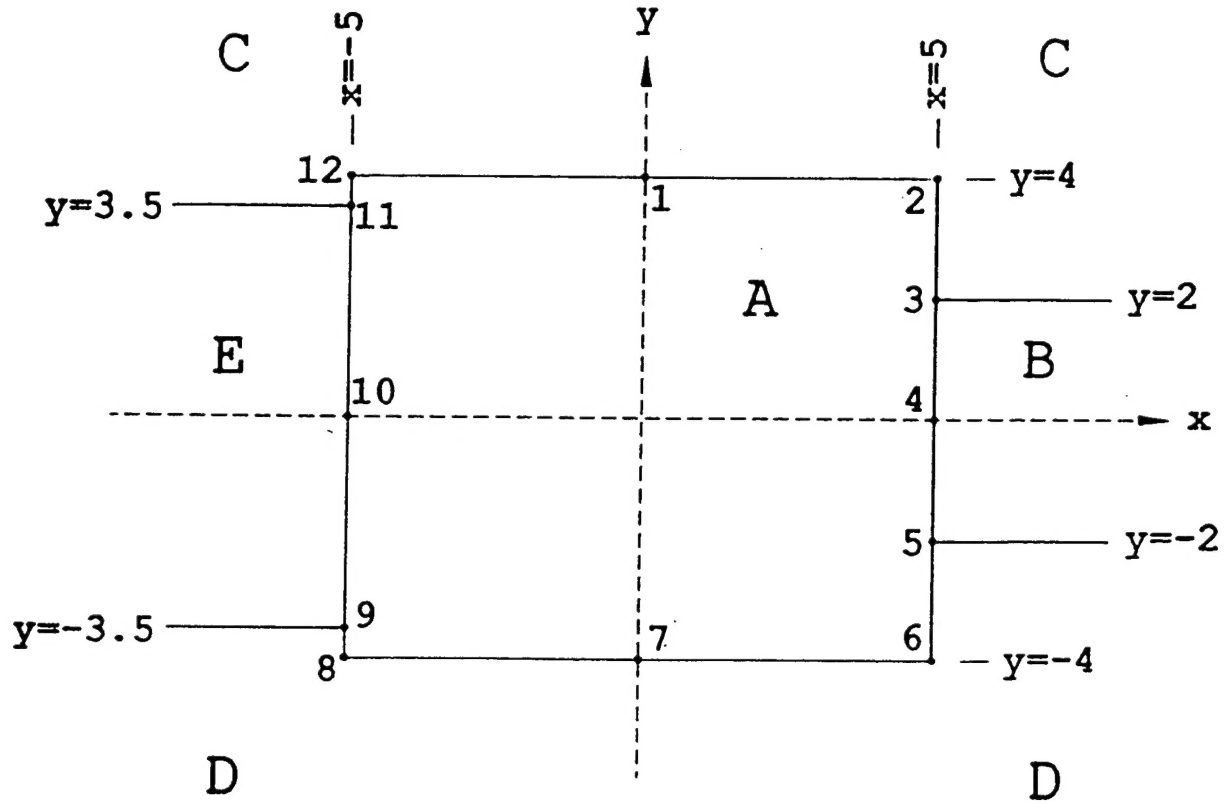In this region, the asymptotic series

2

Figure 1: Definition of Regions A-E [6].

$$D_p'(z) \sim -\frac{e^{-z^2/4}z^{p+1}}{2}\left[1 - \frac{p(p+3)}{1!(2z^2)^1} + \frac{p(p-1)(p-2)(p+5)}{2!(2z^2)^2}\right.$$
$$\left. - \frac{p(p-1)(p-2)(p-3)(p-4)(p+7)}{3!(2z^2)^3} + - \cdots\right] \tag{4}$$

is used. This series can be obtained by differentiating the asymptotic expansion for $D_p(z)$ given in [1, p.347] or, more easily, by using the recursion formula [2, Eq. 19.6.3]:

$$D_p'(z) = \frac{1}{2}\left[pD_{p-1}(z) - D_{p+1}(z)\right]. \tag{5}$$

The expansion (4) is valid for all p and for $|\arg(z)| < 3\pi/4$ when $p \ll z$ [1, p.347]. The summation in (4) is continued until the terms start to increase in magnitude. At least five significant figure accuracy can be obtained.

Region C: All x, and $y \geq 2$ except in regions A and E.

3

In this region we use a large order asymptotic expansion obtained by Olver [7]: [1]

$$D'_{-\frac{1}{2}+iy}(x\alpha) \sim -2^{-1/2}\mu'g(\mu'\alpha^*)(t'^2+1)^{1/4}e^{-i\mu'^2\xi}\sum_{s=0}^{\infty}\frac{i^s\tilde{v}_s(t)}{(R^3\mu'^2)^s} \tag{6}$$

where

$$\mu' = \sqrt{2y}, \quad \mu' > 0,$$

$$t' = \frac{x}{\sqrt{2}\mu'},$$

$$R = (t'^2+1)^{1/2},$$

$$g(w) = 2^{-(1+w^2)/4}e^{-w^2/4}w^{-(1-w^2)/2}\left[1+\sum_{s=0}^{\infty}\frac{g_{2s+1}}{w^{4s+2}}\right]^{-1},$$

$$g_1 = \frac{1}{24}, \quad g_3 = -\frac{2021}{207360}, \quad g_5 = \frac{5149591}{418037760},$$

$$\xi = \frac{i\pi}{4} - \frac{\text{sgn}(t')}{2}\left[|t'|R + \ln(|t'|+R)\right], \quad \text{sgn}(t') = \frac{t'}{|t'|},$$

$$\tilde{v}_0 = 1, \quad \tilde{v}_1 = -\frac{t'^3-6t'}{24}, \quad \tilde{v}_2 = -\frac{15t'^4+327t'^2-143}{1152},$$

$$\tilde{v}_3 = \frac{4042t'^9+18189t'^7+36387t'^5+238425t'^3-259290t'}{414720}.$$

The terms given here give at least four significant figure accuracy, with the accuracy improving as y increases. Additional terms in the expansion can be obtained using algorithms given by Olver [7].

Region D: All x, and $y \leq -2$ except Regions A and E.

In this region we use the following large order asymptotic expansion obtained by Olver [7]: [2]

$$D'_{-\frac{1}{2}+iy}(x\alpha) \sim i\left(\frac{\pi}{2}\right)^{1/2}\mu'^{2/3}\frac{g(\mu'\alpha)}{\Phi}\left\{\frac{\left[Ai(-\mu'^{4/3}\zeta)-iBi(-\mu'^{4/3}\zeta)\right]}{\mu'^{4/3}}\sum_{s=0}^{\infty}(-1)^s\frac{C_s}{\mu'^{4s}}\right.$$

$$\left. -\left[Ai'(-\mu'^{4/3}\zeta)-iBi'(-\mu'^{4/3}\zeta)\right]\sum_{s=0}^{\infty}(-1)^s\frac{D_s}{\mu'^{4s}}\right\}, \quad x \geq 0 \tag{7}$$

---

[1]Equation (6) is obtained starting with [7, Eq.(4.13)], identifying μ with $\sqrt{2y}e^{i\pi/4}$, t with $-ix/(2\sqrt{y})$, and using [7, Eqs.(3.4), (11.6), (11.7), (11.8), (6.1), (4.12), (4.14), (4.16) , and Fig. (2b)]. See also [6, Eq.(6)] and [8, Sect. 12.6.5].

[2]Equation (7) is obtained starting with [7, Eq.(8.15)], identifying μ with $2\sqrt{|y|}e^{-i\pi/4}$, t with $x/(2\sqrt{|y|})$, using [7, Eqs. (8.16),(7.4), (11.21), (8.18), (8.19), (4.14), (4.16), (8.13)], and [2, Eq. (10.4.9). Equation (8) is similarly obtained starting again with [7, Eq.(8.15)], letting $\mu \to \mu^{i\pi}$, and using [7, Eq.(5.24)]. See also [6, Eqs.(7) and (8)]. For general background on these expansions see [9, Ch.11].

4

$$D'_{-\frac{1}{2}+iy}(x\alpha) \sim (2\pi)^{1/2}\mu'^{2/3}e^{\pi\mu'^2/2}\frac{g(\mu'\alpha)}{\Phi}\left\{\frac{-Ai(-\mu'^{4/3}\zeta)}{\mu'^{4/3}}\sum_{s=0}^{\infty}(-1)^s\frac{C_s}{\mu'^{4s}}\right.$$

$$\left.+Ai'(-\mu'^{4/3}\zeta)\sum_{s=0}^{\infty}(-1)^s\frac{D_s}{\mu'^{4s}}\right\}, \quad x \le 0 \tag{8}$$

where Ai, Bi, Ai', and Bi' are the Airy functions and their derivatives [2, Sect. 10.4], and $g(\mu'\alpha)$ is defined as for Region C. The other quantities are defined by

$$\mu' = \sqrt{2|y|},$$

$$t = \frac{|x|}{\sqrt{2}\mu'},$$

$$\frac{4}{3}\zeta^{3/2} = t(t^2-1)^{1/2} - \ln[t+(t^2-1)^{1/2}], \quad t \ge 1, \quad (\zeta \ge 0),$$

$$\frac{4}{3}(-\zeta)^{3/2} = \arccos(t) - t(t^2-1)^{1/2}, \quad -1 < t \le 1, \quad (\zeta \le 0),$$

$$\Phi = \left(\frac{\zeta}{t^2-1}\right)^{1/4},$$

$$C_s = -\frac{1}{(t^2-1)^{3s+1}}\Phi^2\sum_{m=0}^{2s+1}b_m\Phi^{-6m}v_{2s-m+1}(t),$$

$$D_0 = 1, \quad D_s = -\frac{1}{(t^2-1)^{3s}}\sum_{m=0}^{2s}a_m\Phi^{-6m}v_{2s-m}(t),$$

$$v_0(t) = 1, \quad v_1(t) = \frac{t^3+6t}{24}, \quad v_2(t) = \frac{15t^4-327t^2-143}{1152},$$

$$v_3(t) = \frac{-4042t^9+18189t^7-36387t^5+238425t^3+259290t}{414720},$$

$$a_0 = 1, \quad a_m = \frac{(2m+1)(2m+3)\cdots(6m-1)}{m!(144)^m}, \quad b_m = -\frac{6m+1}{6m-1}a_m.$$

For $|t-1| < 0.25$, Φ and ζ should be computed by the expressions given in [6], while for $|t-1| < 0.05$, the following expansions, obtained using Mathematica, should be used for C_0, C_1, and D_1:

$$\delta = t - 1$$

$$C_0 = -\frac{\Phi^2}{t+1}\left(\frac{1}{5}+\frac{3}{25}\delta+\frac{97}{2250}\delta^2-\frac{173}{385000}\delta^3+\cdots\right),$$

$$C_1 = \frac{\Phi^2}{(t+1)^4}\left(\frac{88579}{462000}+\frac{88579}{220000}\delta+\frac{11626038701}{22702680000}\delta^2+\frac{1480656484897}{4824319500000}\delta^3+\cdots\right),$$

$$D_1 = \frac{1}{(t+1)^3} \left(\frac{2041}{25200} + \frac{48577}{2772000}\delta + \frac{279481}{840840000}\delta^2 - \frac{21114659}{227026800000}\delta^3 + \cdots \right),$$

The terms given here give at least four significant figure accuracy for $D'_{-1/2+iy}(x\alpha)$ in Region D.

Region E: $x \leq -5$, $-3.5 \leq y \leq 3.5$.

In this region we use the relation, valid for all z and p, obtained from [1, Sect. 16.52]:

$$D'_p(z) = -e^{p\pi i} D'_p(-z) - \frac{i\sqrt{2\pi}}{\Gamma(-p)} e^{(p+1)\pi i/2} D'_{-p-1}(-iz) \tag{9}$$

For $p = -1/2 + iy$ and $z = xe^{-i\pi/4}$,

$$D'_p(z) = -e^{p\pi i} D'_p(-z) - \frac{i\sqrt{2\pi}}{\Gamma(-p)} e^{(p+1)\pi i/2} D'^*_p(-z) \tag{10}$$

where $D'_p(-z)$ is calculated as above for Regions B, C, or D.

3 Numerical Results

To illustrate the accuracy of the expansions we have presented, in Table 1 we compare the results obtained with the expansions for Regions B-E with the Region A results for 12 points on the perimeter of Region A (see Figure 1), corresponding to the results given by Blanchard and Newman [6] for the parabolic cylinder function itself. Table 1 gives the values of x and y, the region whose expansion was used in the calculation, the calculated value of $D'_p(z)$, and the number of significant digits. The exact power series results for Region A have been checked with Mathematica and are correct to the number of figures shown.

4 Conclusion

In this report we have presented numerically useful expressions for calculating the derivative of the parabolic cylinder function, $D'_p(z)$, for the special case $p = -1/2 + iy$ and $z = xe^{-i\pi/4}$. This case is needed for calculating the currents excited on a perfectly conducting parabolic cylinder by a TE plane wave, and for calculating the scattered far field pattern.

Table 1: Values of $D'_p(z)$ at selected points in Figure 1: $z = xe^{-i\pi/4}$ and $p = -1/2 + iy$

Point	x	y	Region	$D'_p(z)$	Significant Digits
1	0	4	A	-0.214019E+02 - i0.867551E+01	6
1	0	4	C	-0.214038E+02 - i0.867624E+01	4.1
2	5	4	A	-0.292821E+02 - i0.586851E+00	6
2	5	4	C	-0.292820E+02 - i0.586872E+00	4.7
3	5	2	A	0.557884E+01 - i0.146969E+01	6
3	5	2	B	0.557885E+01 - i0.146966E+01	5.5
3	5	2	C	0.557886E+01 - i0.146962E+01	5.2
4	5	0	A	-0.103126E+01 + i0.437434E+00	6
4	5	0	B	-0.103126E+01 + i0.437433E+00	6
5	5	-2	A	0.197734E+00 - i0.775546E-01	6
5	5	-2	B	0.197733E+00 - i0.775537E-01	5
5	5	-2	D	0.197735E+00 - i0.775577E-01	4.5
6	5	-4	A	-0.384484E-01 + i0.378112E-02	6
6	5	-4	D	-0.384484E-01 + i0.378114E-02	5.7
7	0	-4	A	-0.214019E+02 + i0.867551E+01	6
7	0	-4	D	-0.214033E+02 + i0.867600E+01	4.3
8	-5	-4	A	0.581438E+04 - i0.235691E+04	6
8	-5	-4	D	0.581437E+04 - i0.235691E+04	6
9	-5	-3.5	A	0.424382E+04 - i0.236275E+03	6
9	-5	-3.5	D	0.424382E+04 - i0.236275E+03	6
9	-5	-3.5	E	0.424382E+04 - i0.236275E+03	6
10	-5	0	A	-0.190613E+01 - i0.437434E+00	6
10	-5	0	E	-0.190613E+01 - i0.437433E+00	6
11	-5	3.5	A	-0.112470E+02 - i0.159690E+02	6
11	-5	3.5	C	-0.112468E+02 - i0.159688E+02	5.7
11	-5	3.5	E	-0.112470E+02 - i0.159690E+02	6
12	-5	4	A	-0.214258E+02 - i0.199681E+02	6
12	-5	4	C	-0.214258E+02 - i0.199680E+02	6

References

[1] E.T. Whittaker and G.N. Watson, (1958) *A Course of Modern Analysis*, 4th Ed., Cambridge, U.K.: Cambridge University Press

[2] M. Abramowitz and I.A. Stegun, eds., (1970) *Handbook of Mathematical Functions*, 9th Printing, New York: Dover Publications, Ch. 19.

[3] J. Spanier and K.B. Oldham, (1987) *An Atlas of Functions*, Washington: Hemisphere Publishing Co., Ch. 46.

[4] C.J.P. Miller, (1955) *Tables of Weber Parabolic Cylinder Functions*, London, U.K.: H.M. Stationery Office

[5] J.J. Bowman, T.B.A. Senior, and P.L.E. Uslenghi, eds. (1987) *Electromagnetic and Acoustic Scattering by Simple Shapes*, Revised Printing, New York: Hemisphere Publishing Co.

[6] J.L. Blanchard and E.H. Newman, (1989) Numerical Evaluation of Parabolic Cylinder Functions, *IEEE Trans. Antennas Propagat.*, **37**:519-523. (The following misprints should be noted: In the expression for $g(w)$ following Eq.(6), the exponent of w should be $-(1-w^2)/2$; in Eq.(8), $e^{(\pi/4)i}$ should be $e^{-(\pi/4)i}$; following Eq.(9), $z = xe^{-(\pi/4)i}$ and in Eq.(10), $e^{-((p+1)/2)\pi i}$ should be $e^{+((p+1)/2)\pi i}$.)

[7] F.W.J. Olver, (1959) Uniform Asymptotic Expansions for Weber Parabolic Cylinder Functions of Large Orders, *J. Research NBS*, **63B**, 2:131-169

[8] C.E. Pearson, ed. (1983) *Handbook of Applied Mathematics*, 2nd Ed., New York: Van Nostrand Reinhold

[9] F.W.J. Olver, (1974) *Asymptotics and Special Functions*, New York: Academic Press

9

MISSION

OF

ROME LABORATORY

Mission. The mission of Rome Laboratory is to advance the science and technologies of command, control, communications and intelligence and to transition them into systems to meet customer needs. To achieve this, Rome Lab:

a. Conducts vigorous research, development and test programs in all applicable technologies;

b. Transitions technology to current and future systems to improve operational capability, readiness, and supportability;

c. Provides a full range of technical support to Air Force Materiel Command product centers and other Air Force organizations;

d. Promotes transfer of technology to the private sector;

e. Maintains leading edge technological expertise in the areas of surveillance, communications, command and control, intelligence, reliability science, electro-magnetic technology, photonics, signal processing, and computational science.

The thrust areas of technical competence include: Surveillance, Communications, Command and Control, Intelligence, Signal Processing, Computer Science and Technology, Electromagnetic Technology, Photonics and Reliability Sciences.